

RELIABILITY TEST REPORT

Report No: 20210510002

Page: 1 of 4

Date: May 10, 2021

RAYTAC CORPORATION
5F., NO.3, JIANKANG ROAD, ZHONGHE DISTRICT,
NEW TAIPEI CITY, 23586, TAIWAN

Product Description: nRF52833 Bluetooth Module
Style / Item No.: MDBT50Q-512K/P512K / No.1, No.2
Manufacturer/ Vendor: Raytac Corporation
Country of Origin: Taiwan
Testing Required: Low temperature maintain test
Testing Method: JASO D001-94, Clause 5.12
Quantity: Total 2 sets
Testing Period: Apr. 19, 2021 to Apr. 22, 2021
Testing Results: -Please See Attached Sheets

**Signed for and on behalf of
Raytac Corporation.**

Stanley Huang
Deputy Manager

RELIABILITY TEST REPORT

Report No: 20210510002

Page: 2 of 4

Date: May 10, 2021

1. Low temperature maintain test:

Test Equipment:

Name	Brands	Model	Serial No.
Testing Chamber	Haich	HC-TOPH-22-CH	QHC20200707-122-3
DC Power Supply	GOODWILL	GPC-1850D	E873364

Lab Environmental Conditions:

Ambient Temperature: (25 ± 3) °C

Ambient humidity: (55 ± 20) % RH

Test Method/ Specification:

Test method: Refer to JASO D001-94, Clause 5.12

Sample condition: Operating

Temperature: -40°C

Duration: 72 Hours

- Sample Condition: Operating
- Examine the appearance of specimen(s) by visual check and perform functional check during this test.
- Functional check: Connect the specimen(s) with notebook and examine whether the signal transmission could work normally or not.



RELIABILITY TEST REPORT

Report No: 20210510002

Page: 3 of 4

Date: May 10, 2021

Specimen:

Style / Item No.: MDBT50Q-512K/P512K / No.1, No.2

Quantity: Total 2 sets

Testing time: 72 hours

Data packet size: 244 bytes

Data rate: 244 bytes * 4 packets/sec = 976 bytes/sec

Number of data sent: Total 252,979,200 bytes

Test Result:

Check Item Style/Items No.	Appearance check (Visual check)	Functional Check
MDBT50Q-512K / No.1	No visible damage	No data loss
MDBT50Q-P512K / No.2	No visible damage	No data loss


RELIABILITY TEST REPORT

Report No: 20210510002

Page: 4 of 4

Date: May 10,2021


Test Photos:

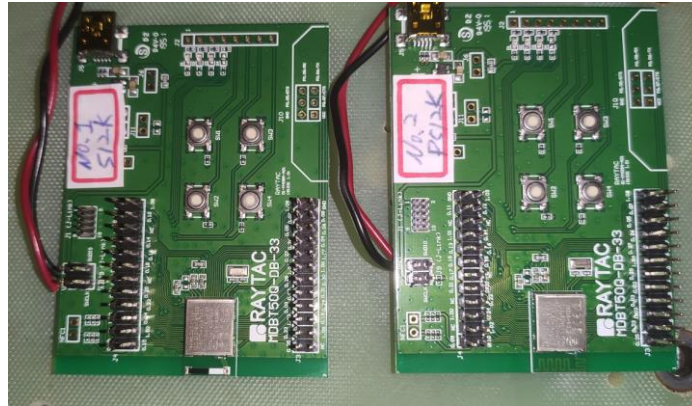


1. Appearance of specimen




2. Low temperature maintain test

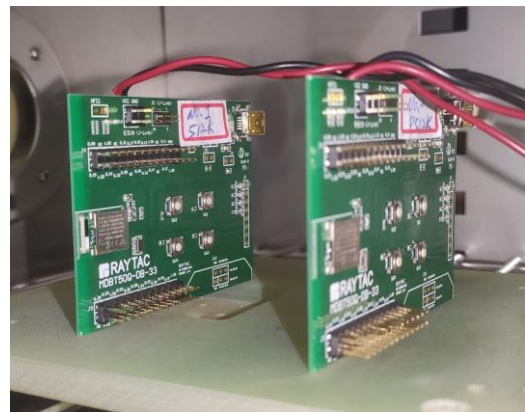

3. Low temperature maintain test

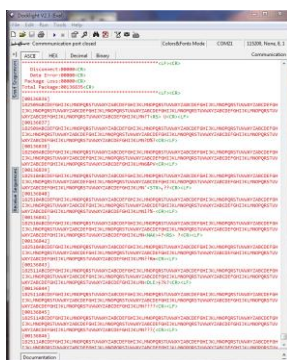

4. Functional check MDBT50Q-512K/ No.1

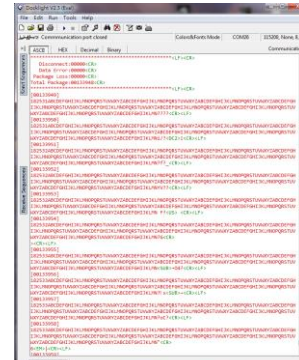

5. Functional check MDBT50Q-P512K/ No.2

The End of Test Report